


# PNW Spot Nextion Display Quick-Start Guide

## Nextion Screen Setup:

1. Before powering on your hotspot, plug your screen into the inner Micro-USB Port.
2. Power the hotspot using the outer Micro-USB Port.
3. If you disconnect the screen, you must restart the hotspot after it is plugged back in.

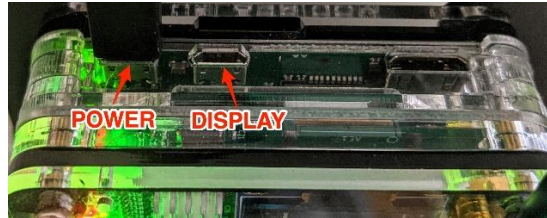

## Re-Enabling built-in OLED screen:

1. Access the **hotspot dashboard**. (Use web browser and go to use <http://pi-star/> or <http://pi-star.local>)
2. Head to **Configuration** in the upper right (UN/PW is pi-star/raspberry)
3. At the bottom of the **MMDVMHost Configuration** section, set:
  - a. Display Type = OLED Type 3
  - b. Port = /dev/ttyAMA0
  - c. Nextion Layout = ON7LDS L3
4. Apply changes, shut down hotspot, and re-apply power to restart

YSF2X00N:	<input type="checkbox"/>	
YSF2P25:	<input type="checkbox"/>	
DMR2YSF:	<input type="checkbox"/>	Uses 7 prefix on DMRGateway
DMR2X00N:	<input type="checkbox"/>	Uses 7 prefix on DMRGateway
POCSAG:	<input type="checkbox"/>	POCSAG Paging Features
MMDVM Display Type:	OLED Type 3	Port: /dev/ttyAMA0
		Nextion Layout: ON7LDS L3
<input type="button" value="Apply Changes"/>		

## Re-Enabling Nextion Screen:

1. Follow the above instructions to access display settings
2. At the bottom of the **MMDVMHost Configuration** section, set:
  - a. Display Type = Nextion
  - b. Port = /dev/ttyNextionDriver
  - c. Nextion Layout = ON7LDS L3
3. Apply changes, shut down hotspot, and re-apply power to restart